


NOTES:

- . THICKNESS "T" AS SPECIFIED.
- . WIDTH "W" AS SPECIFIED.
- . EXPANSION JOINTS SHALL BE PLACED DIRECTLY OVER BRIDGE DECK EXPANSION JOINTS, IMMOVABLE STRUCTURES AND AT POINTS OF CURVATURE FOR SHORT RADIUS CURVES.
- . CONTRACTION JOINTS SHALL BE PLACED AT INTERVALS NOT EXCEEDING 3m. JOINT DEPTH SHALL BE 50mm.

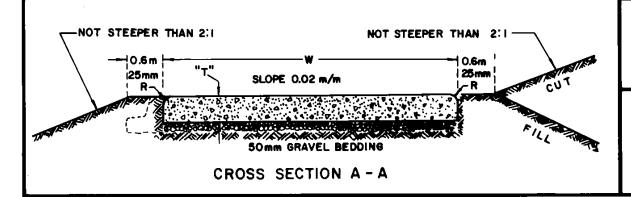

50mm GRAVEL BEDDING

LONGITUDINAL SECTION B-B

3 m



DWG. Nº	CB-6 4.2 M78	
	Date	
Original	MAY	1988
Revised		
Revised		

POURED IN PLACE CONCRETE SIDEWALK