
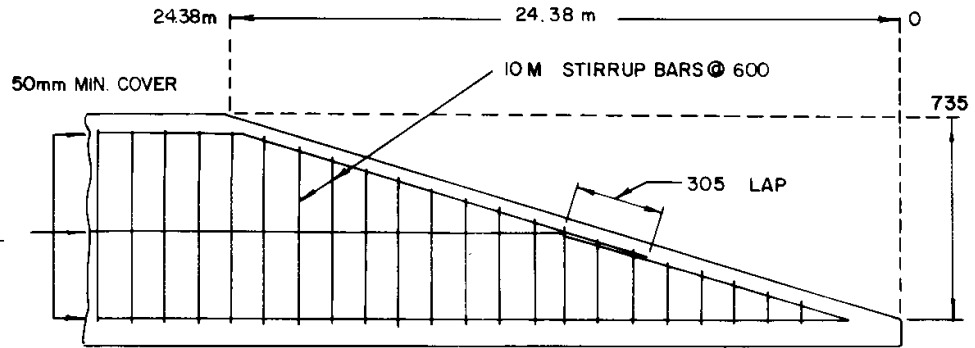


JP WIDTH OF MEDIAN
 B—OFFSET FROM REFERENCE LINE ON
 SIDE OF TRAFFIC GOING AWAY.
 C—OFFSET FROM REFERENCE LINE ON
 SIDE OF APPROACHING TRAFFIC.

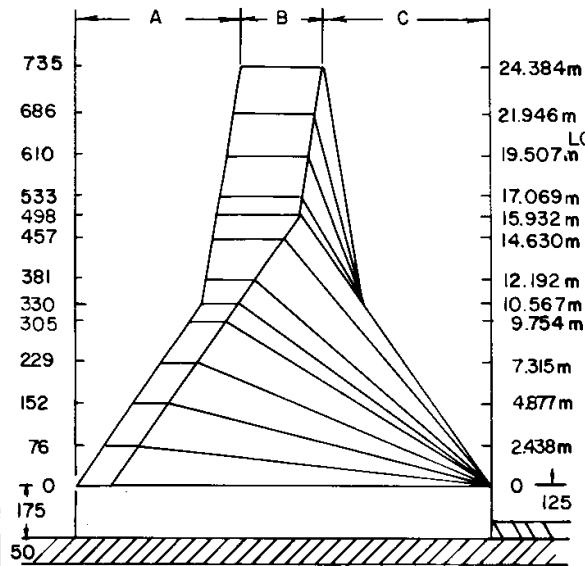

1. ALL CONCRETE SHALL BE 40MPa AT 28 DAYS.
2. ALL REINFORCEMENT SHALL BE EPOXY COATED REINFORCING BARS.
3. ALL EXPOSED CONCRETE SHALL HAVE A SMOOTH SURFACE.
4. EXPOSED SURFACES SHALL HAVE 20mm CHAMFER OR FILLET OR AS OTHERWISE SPECIFIED.
5. ALL SURFACES SHALL BE FORMED WITH OILED PLYWOOD OR STEEL FORMED FINISH.
6. ALL VOIDS ARE TO BE CAPPED AND WATERPROOFED.
7. EXPOSED SURFACES SHALL HAVE AN APPROVED SEALING SOLUTION APPLIED.

LENGTH FROM END m	RISE mm	A mm	B mm	C mm
24.384	735	200	280	280
21.946	686	200	268	292
19.507	610	200	257	303
17.069	533	200	244	316
15.932	498	200	239	321
14.630	457	172	233	348
12.192	381	118	221	398
10.567	330	82	209	431
9.754	305	82	193	447
7.315	229	82	141	497
4.877	152	82	97	546
2.438	76	82	49	595
0	0	82	0	645

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.

	CB-6 PLAN NO.	4.3 M4
	WORK	DATE
		MAY 1985
	CHART REV.	JUNE 1986
		OCT. 1986
TRANSITION END SECTION FOR REINFORCED CONCRETE MEDIAN BARRIER CURB F SHAPE		