




Ø168 x 2400 x 6.35 STEEL BOLLARD  
1200 ABOVE GROUND C/W 6 mm LOW  
DENSITY YELLOW POLYETHYLENE SLEEVE  
(ROUND CAP) 5 REQUIRED

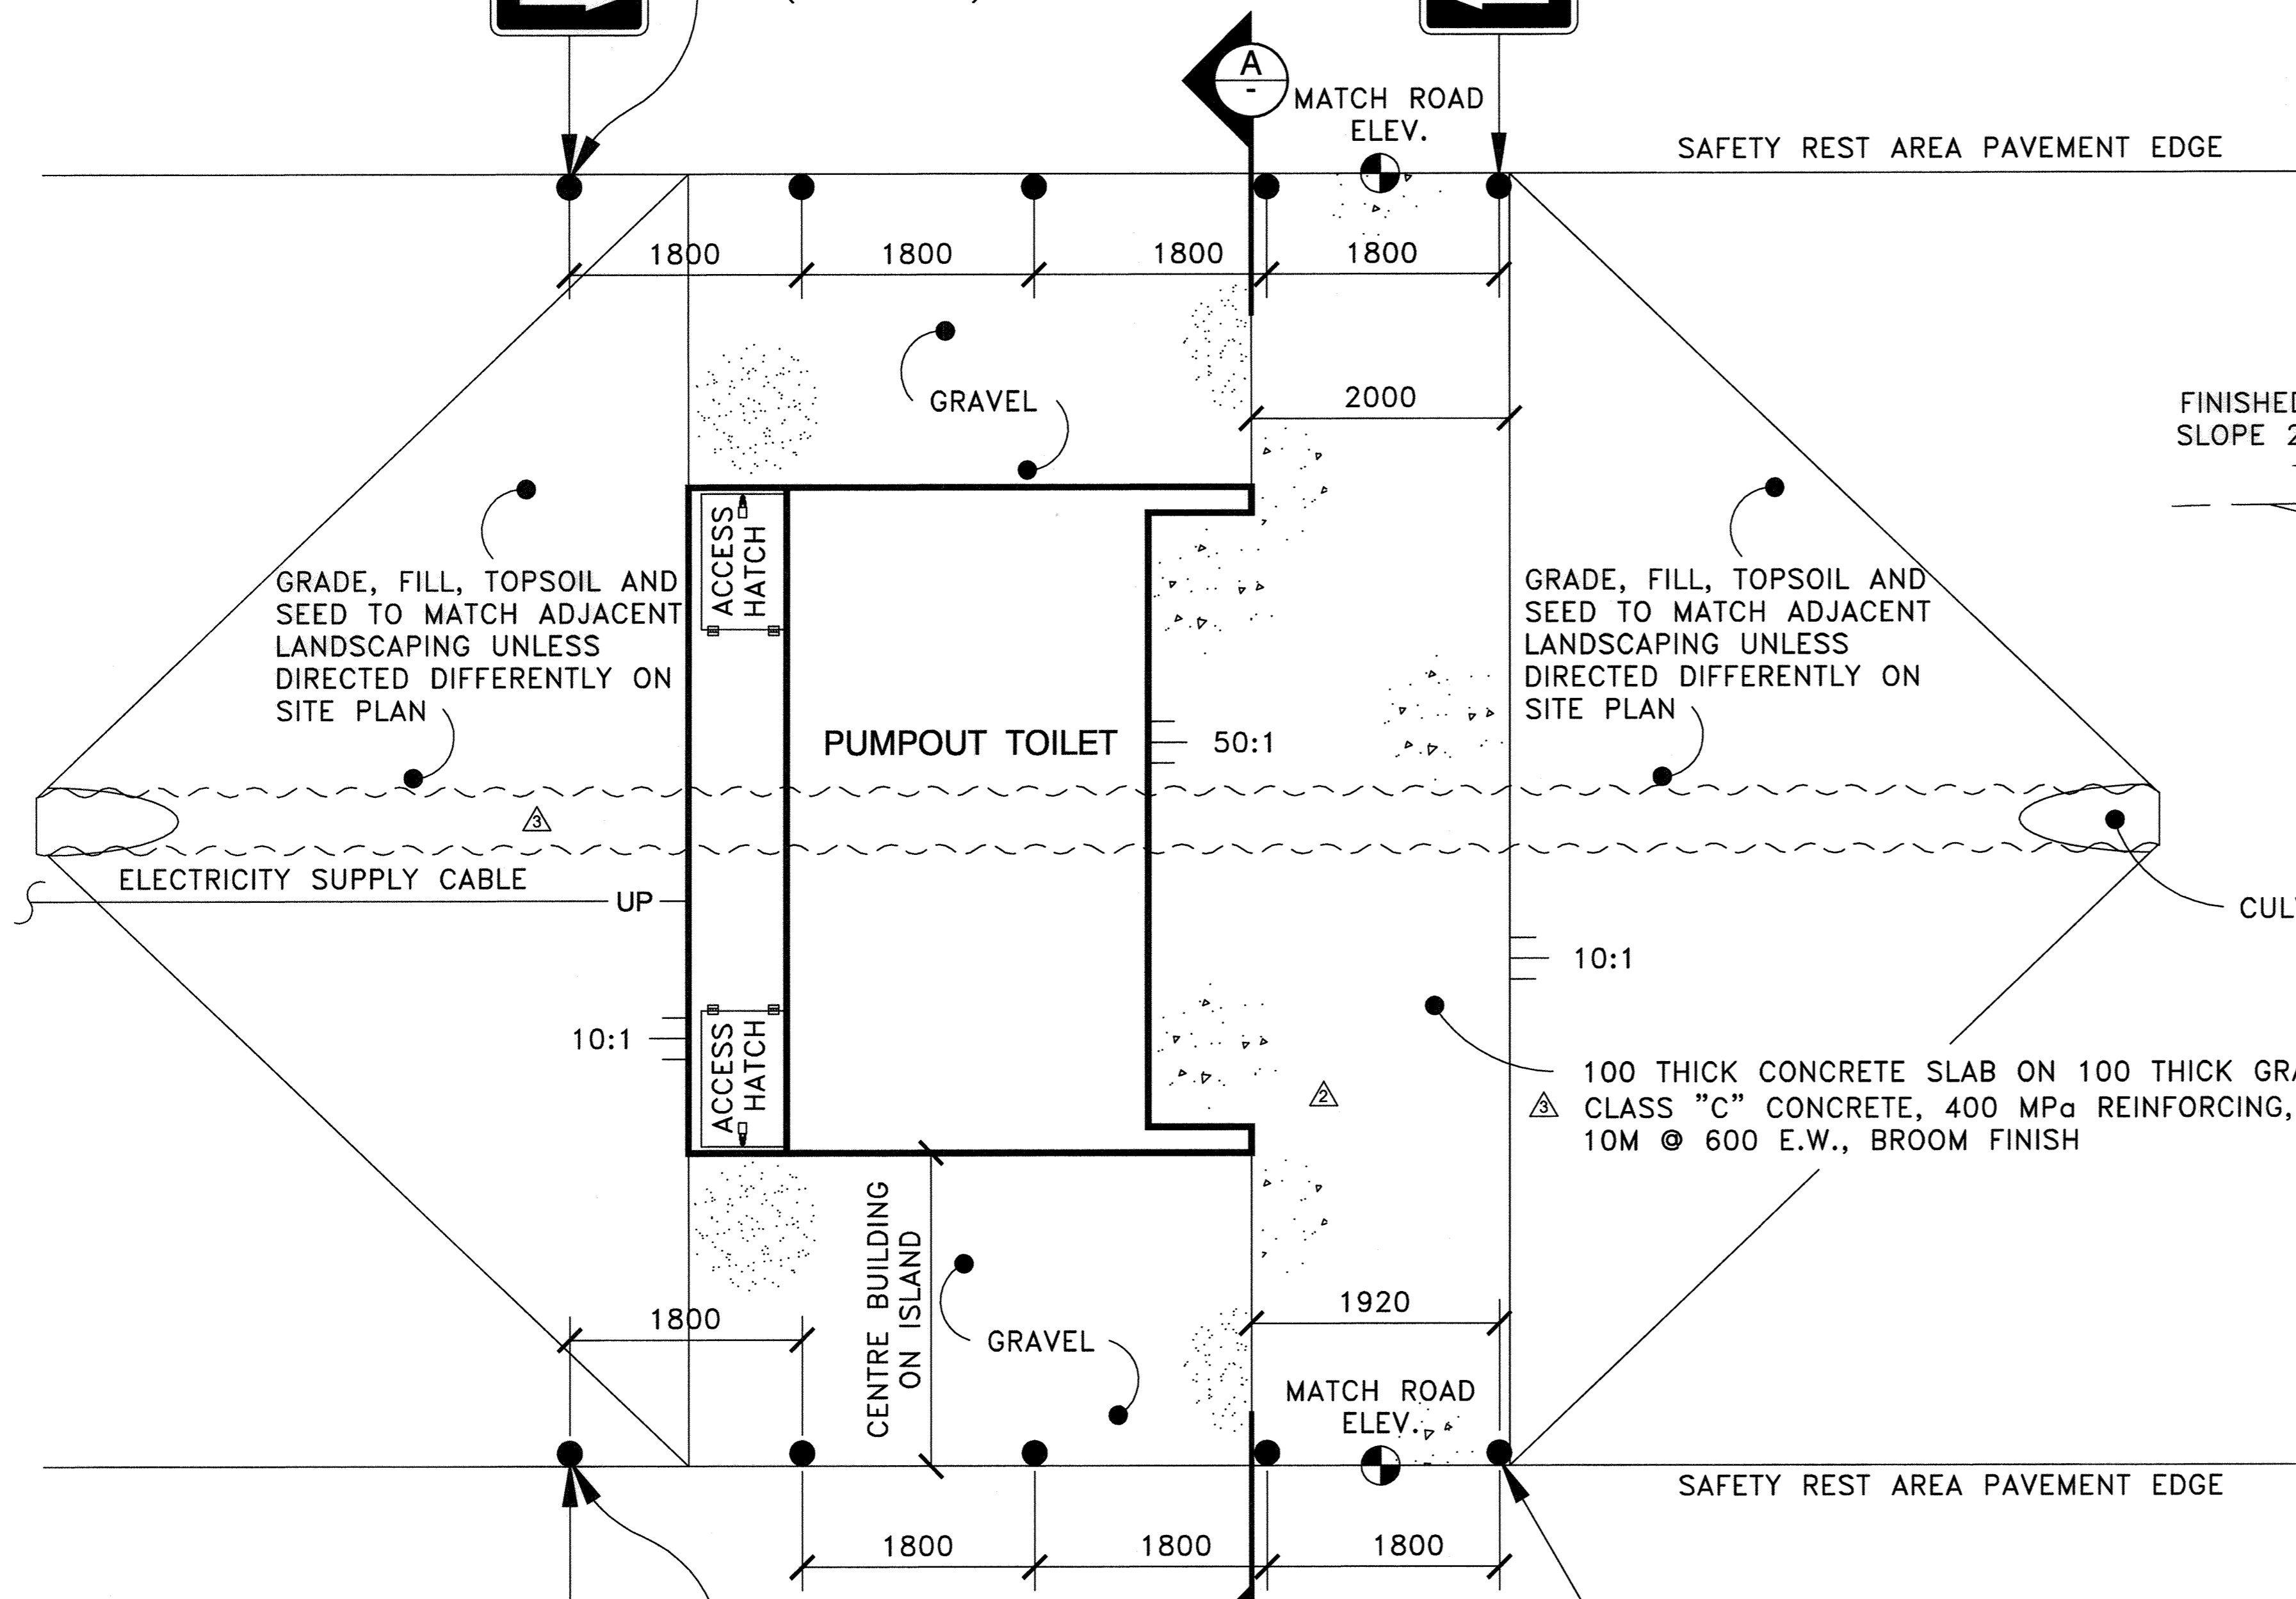

GRADE, FILL, TOPSOIL AND  
SEED TO MATCH ADJACENT  
LANDSCAPING UNLESS  
DIRECTED DIFFERENTLY ON  
SITE PLAN


GRADE, FILL, TOPSOIL AND  
SEED TO MATCH ADJACENT  
LANDSCAPING UNLESS  
DIRECTED DIFFERENTLY ON  
SITE PLAN

PUMPOUT TOILET 50:1

100 THICK CONCRETE SLAB ON 100 THICK GRAVEL  
CLASS "C" CONCRETE, 400 MP<sub>a</sub> REINFORCING,  
10M @ 600 E.W., BROOM FINISH

Ø168 x 2400 x 6.35 STEEL BOLLARD  
1200 ABOVE GROUND C/W 6 mm LOW  
DENSITY YELLOW POLYETHYLENE SLEEVE  
(ROUND CAP) 5 REQUIRED


**SITE PLAN**  
N.T.S.

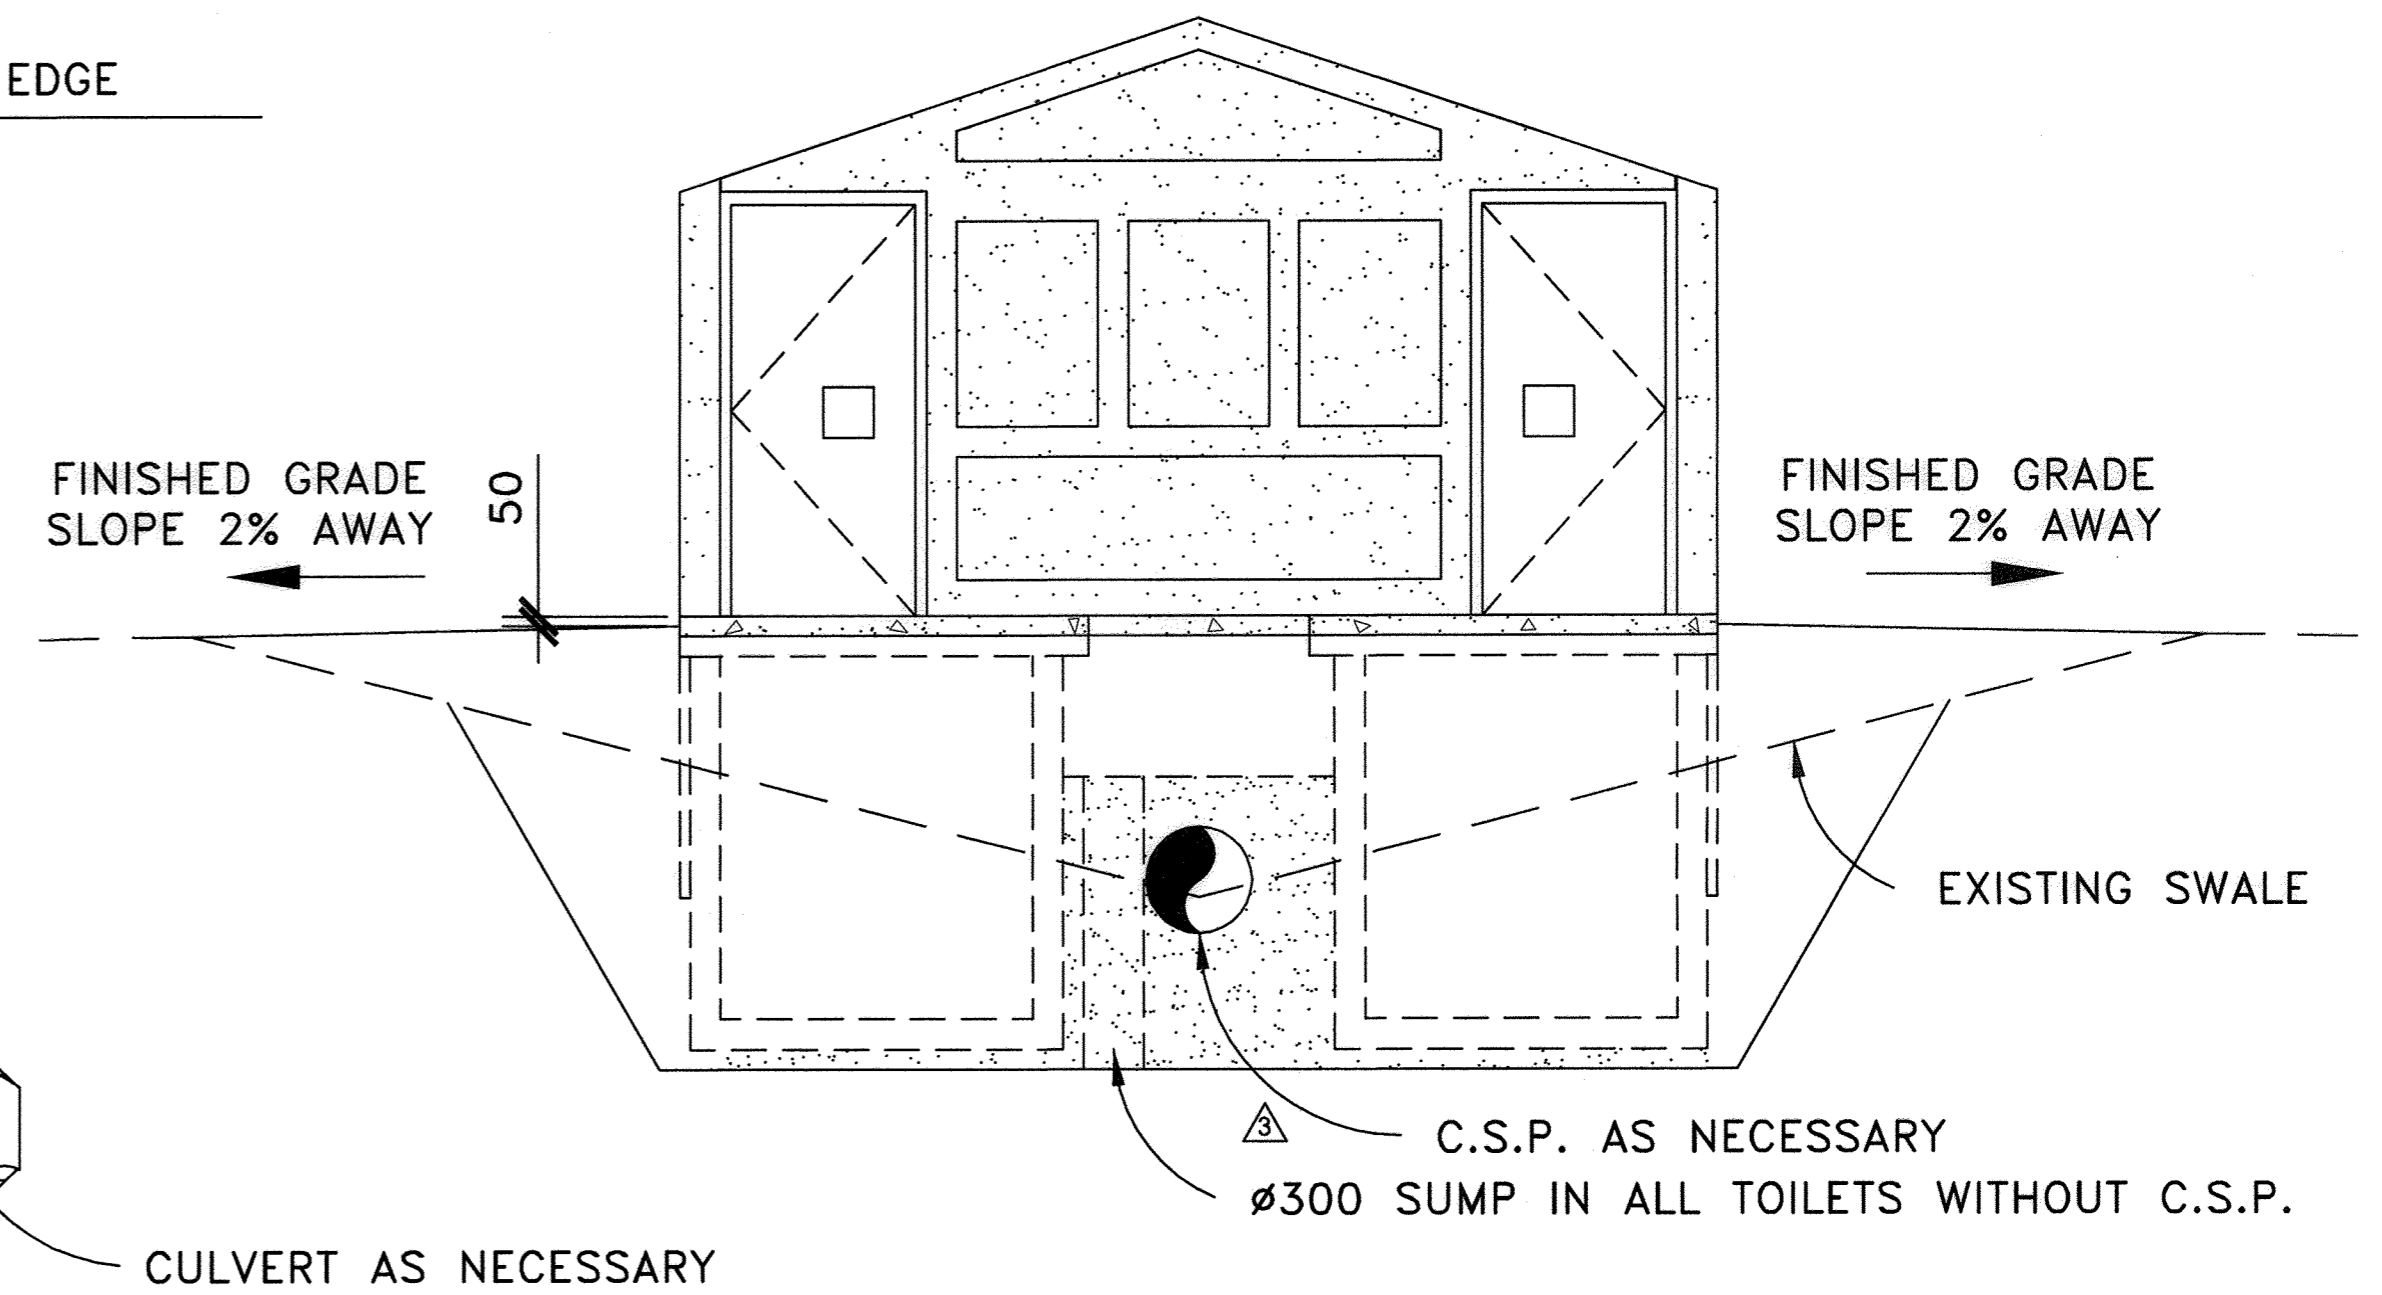

**SECTION A - A**  
N.T.S.

**NOTES:**

- ALL DIMENSIONS SHOWN IN MILLIMETRES UNLESS OTHERWISE INDICATED
- INSTALL "HANDICAP PARKING" SIGNS ON U-CHANNEL ON BACK OF END BOLLARDS UNLESS DIRECTED DIFFERENTLY ON SITE PLAN
- WORK THESE DRAWINGS TOGETHER CB6-4.6M1 TO 20

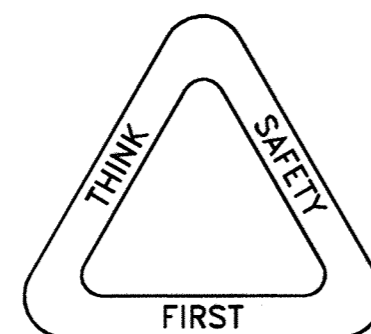

REV	DATE	REVISIONS	BY
△	2013-01-18	REVISED SHEET SURROUND	AN
△	2012-02-07	CHANGED CONCRETE SLAB AND NOTES MOVED AND ADDED C.S.P.	AN
△	2011-06-27	REVISED SITE PLAN	AN
△	2009-06-15	REDRAWN	SS
DESIGNER	AN	CHECKER	

RECOMMENDED DIRECTOR HIGHWAY OPERATIONS

*[Signature]*

APPROVED EXECUTIVE DIRECTOR TECHNICAL STANDARDS BRANCH

*[Signature]*

DATE FEB 8/13

**Alberta** Transportation

**DOUBLE TOILET**  
**TYPICAL LAYOUT PLAN 2 AND SECTION**

DEPARTMENT BAR CODE	DATE	SHEET	DRAWING
	2009-06-15	3 OF 21	CB6-4.6M3